



## Series 40 Sliding Window

Double hung and picture windows are available


- Insulated glass panels with optimum thermal air space featuring warm-edge spacer system.
- Tandem rollers ride easily along friction free glide channel.
- Beveled exterior frame for brick mould appearance.
- Double sash locks standard for windows with heights 27 1/4" or greater.
- 3 1/4" jamb.
- All-welded sash and frame.
- Series 40 3SL available in 1/4 - 1/2 - 1/4 or 1/3 - 1/3 - 1/3 Configurations.
- XO or OX 2-lite styles available.
- Half screen.\*
- White.

## Optional Features

- Low-E glass.
- Low-E glass with argon gas.
- Ultra Low-E glass with argon gas.
- 5/8" or 1" contoured, 5/8" or 3/4" flat, 5/8" contoured valance grids.
- 8 painted exterior colors (white interior only).
- Obscure glass.
- Double strength glass.
- Charcoal aluminum screen.\*
- Lifetime Glass Breakage Warranty.



2-Lite Sliding Window

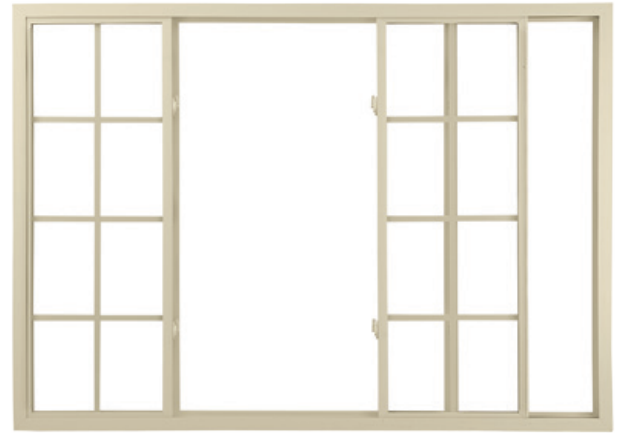

3-Lite Sliding Window



Scan to experience our website.

## Color Options\*\*



ENERGY STAR compliance available in all series. Verify product specifics before ordering.

Note: Manufacturer reserves the right to substitute components as necessary for continued product improvement.  
 \*\* Screens are not meant to restrain a child from falling through an open window.  
 \*\*\* Printing process may affect color shown.  
 Please refer to actual window sample when selecting colors.  
 \*\*\*\* Grid offering limited to 5/8" contoured or SDL on exterior painted windows. Only use mild, water based household cleaner on painted product and rinse immediately with water. See full cleaning instructions for details.